

Topog-E® Series 3000ET

MATERIAL COMPOSITION AND APPLICATION

This form of joint sealant is specially processed by expanding 100% pure polytetra-fluoroethylene (PTFE). It provides a soft, highly compressible gasket for longer life and trouble-free sealing. Its form-in-place versatility cuts maintenance and storage costs. The high compressibility of **Topog-E® Series 3000ET** enables it to effectively fill flange imperfections for a tight, leak-free seal. Under pressure, it provides a very wide, thin ribbon-like joint sealant. Unlike conventional PTFE which is prone to cold flow, **Topog-E® Series 3000ET** has good creep resistance and bolt torque retention properties. It does not support bacterial growth or cause product contamination and is FDA compliant. It has virtually no shelf-life concerns since PTFE is unaffected by normal environmental conditions.

Topog-E® Series 3000ET has excellent resistance properties to chemical attack with a pH range of 0-14. It is ideal for most chemical services at temperatures to 600°F (316°C) and pressure to 3,000 psi (207 bar). It is also suitable for cryogenic use to -321°F (-196°C).

The sealant is available in roll form which helps reduce storage space, and is available in a wide variety of thicknesses and lengths.


EASY TO INSTALL

- Clean the sealing face
- Select size 1/3 to 1/2 flange sealing width
- Cut length needed to allow for overlapping
- Peel adhesive backing and apply to flange
- Overlap the sealant at a bolt
- Bolt up using recommended bolting procedures

ORDERING

Please either contact your local distributor for **Topog-E® Series 3000ET** or contact Topog-E® directly for details of your nearest distributor.

WIDTH	BOILER-MATE	STANDARD LENGTH		BULK LENGTH
1/8"	N/A	50 Feet ET012-050-S3000	100 Feet ET012-100-S3000	500 Feet ET012-500-S3000
3/16"	N/A	75 Feet ET018-075-S3000	150 Feet ET018-150-S3000	750 Feet ET018-750-S3000
1/4"	100 Inches ET025-000-S3000	50 Feet ET025-050-S3000	100 Feet ET025-100-S3000	500 Feet ET025-500-S3000
3/8"	100 Inches ET037-000-S3000	25 Feet ET037-025-S3000	50 Feet ET037-050-S3000	250 Feet ET037-250-S3000
1/2"	56 Inches ET050-000-S3000	15 Feet ET050-015-S3000	30 Feet ET050-030-S3000	150 Feet ET050-150-S3000
5/8"	50 Inches ET062-000-S3000	15 Feet ET062-015-S3000	30 Feet ET062-030-S3000	150 Feet ET062-150-S3000
3/4"	43 Inches ET075-000-S3000	15 Feet ET075-015-S3000	30 Feet ET075-030-S3000	100 Feet ET075-100-S3000
1"	N/A	15 Feet ET100-015-S3000	30 Feet ET100-030-S3000	75 Feet ET100-075-S3000

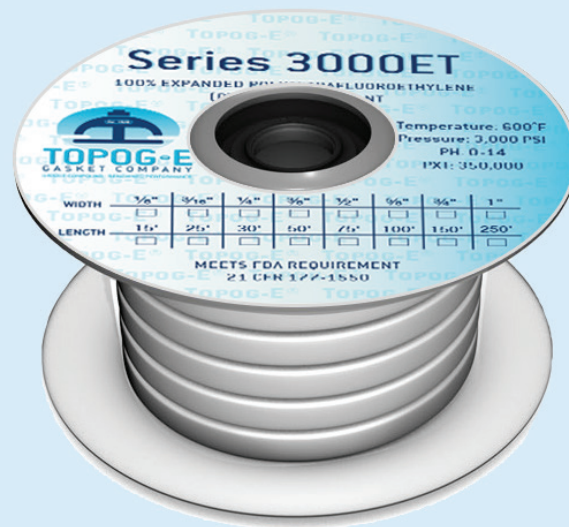

The Topog-E® Gasket Co. · 1224 North Utica · Tulsa, Oklahoma 74110
T: 918-587-6649 · F: 918-587-6961 · E: info@topog-e.com · W: www.topog-e.com

All information in this data sheet is based on data believed to be reliable, however we make no guarantee or warranty of performance of Topog-E® Series 3000 ET Joint Sealant. Because there are many application-specific factors that can affect service life it is always advisable to first test Topog-E® Series 3000 ET Joint Sealant in a particular application to determine their ultimate suitability.